



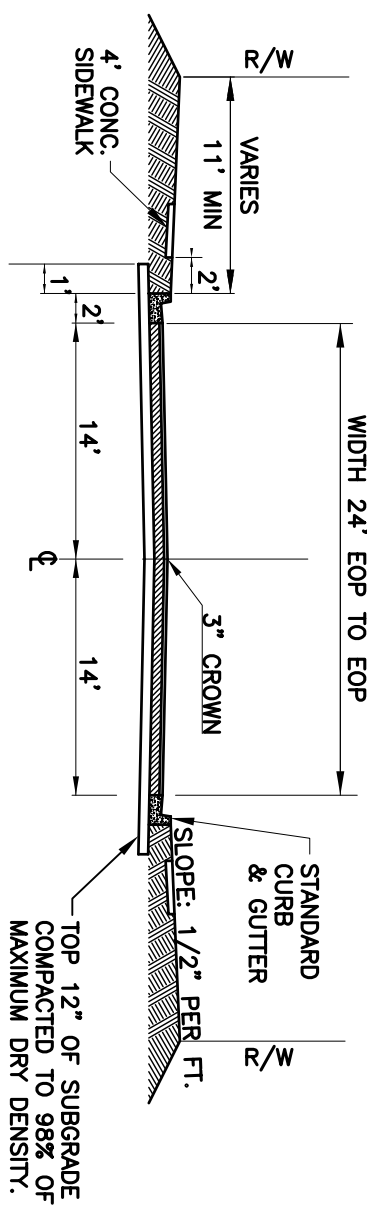

CITY OF FAIRBURN, GEORGIA  
 LOCAL OR MINOR COLLECTOR STREETS  
 IN RESIDENTIAL SUBDIVISIONS

DATE: 10/11/07  
 DETAIL NO. R010

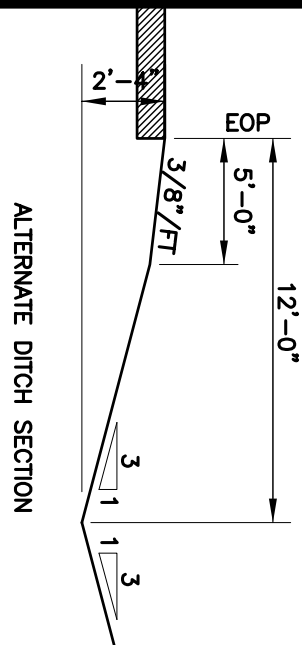

- CRUSHED STONE BASE MATERIAL
- |   |   |
|---|---|
| <u>PAVEMENT COMPOSITION -- ONE-PASS</u>     | <u>PAVEMENT COMPOSITION -- TWO-PASS</u>     |
| 2" 9.5mm ASPHALTIC CONCRETE WEARING SURFACE | 1" 9.5mm ASPHALTIC CONCRETE WEARING SURFACE |
| 6" GRADED AGGREGATE BASE                    | 2" 19.5mm ASPHALTIC CONCRETE BINDER         |
|   | 6" GRADED AGGREGATE BASE                    |

- NOTES:**
1. ANY AREAS OF INADEQUATELY COMPACTED FILL OR UNSUITABLE MATERIAL OF ANY NATURE SHALL BE REMOVED AND REPLACED WITH SUITABLE FILL IN WELL COMPACTED LAYERS TO AT LEAST 95% OF MAXIMUM DENSITY (AASHTO T-99), BEFORE ANY TYPE OF PAVING IS APPLIED.
  2. NO CONTRACTOR SHALL BEGIN TO APPLY PAVING WITHOUT A RELEASE FROM THE DEPARTMENT, AND WILL BE HELD RESPONSIBLE FOR REPLACING ANY PAVING, BASE, AND SUBGRADE WHICH MAY FAIL BECAUSE OF INADEQUATE SUBGRADE CONDITIONS, AS WELL AS FOR ORDINARY PAVING DEFICIENCIES.